

Inferno MP10 TK12 SETUP SHEET

ver.1.03 **KYOSHO**
THE FIRST RADIO CONTROL MODELS

Name of Driver Reno Savoya		Date 21/05/2023	Track TTRC90 CF Bermont Condition: <i>Blue groove</i> Temp: <i>20°C</i>		Engine Picco P3TT DLC	Plug OS P3	Muffler EFRA 2166	
Spur Gear 59 T	Clutch Bell <input checked="" type="checkbox"/> Std. 17 T	Clutch Spring <input checked="" type="checkbox"/> 0.90 <input type="checkbox"/> 1.00 <input checked="" type="checkbox"/> 0.95 <input type="checkbox"/> 1.10	Clutch Shoe Carbon 3 X Aluminum X	Tire Tire: Jetko Sting Compounds: S	Tire Insert AKA	Wheel AKA	Body TK12 light	Fuel Hot road 16% GT

● Diff. Gear Set-Up

	Front	Center	Rear
Diff. Gear	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD Ring Gear 43/13 <input type="checkbox"/> 42/12	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD Diff. Size 10k <input checked="" type="checkbox"/> Small <input type="checkbox"/> Large	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD Ring Gear 43/13 <input type="checkbox"/> 42/12
	#7k	#10k	#7k

● Shock Set-Up

	Front	Rear
Shock Type	P: w/Diaphragm 50 - type P	P: w/Diaphragm 58 - type P
Shock Piston	B: Black 1,2T x 8 W: White T: Taper	B: Black 1,3W x 8
Shock Oil	# 450	# 600
Shock Spring	IF350-6514	IFS002-8515

● Ride Height

Front	Rear
24mm	27mm

● Rebound

Front	Rear
106mm	122mm

● Camber Angle

Front	Rear
-2°	-2°


● Toe Angle

Front	Rear
-2°	<input type="checkbox"/> 2.5° <input checked="" type="checkbox"/> 3° <input type="checkbox"/> 3.5°

● Wheelbase

Collar of Rear Hub	Front Side 5mm Rear Side 0mm
--------------------	---


● Shock Mount Position

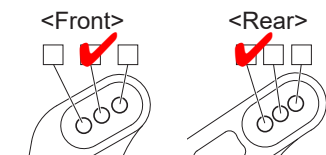

Sus. Arm

Front	<input type="checkbox"/> In <input checked="" type="checkbox"/> Out
Rear	<input type="checkbox"/> In <input checked="" type="checkbox"/> Out

● Rear Upper Arm Position

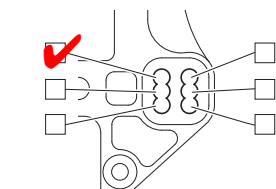

● Rear Wheel Hub

<input type="checkbox"/> Narrow <input checked="" type="checkbox"/> Std. <input type="checkbox"/> Wide
--

Shock Stay


Front	<input type="checkbox"/> Short <input checked="" type="checkbox"/> Long <input type="checkbox"/> Alu <input checked="" type="checkbox"/> Carbon
Rear	<input type="checkbox"/> Short <input checked="" type="checkbox"/> Long <input type="checkbox"/> Alu <input checked="" type="checkbox"/> Carbon

Shock Bush

Front	<input type="checkbox"/> Short <input checked="" type="checkbox"/> Std. <input type="checkbox"/> Long
Rear	<input type="checkbox"/> Short <input type="checkbox"/> Std. <input checked="" type="checkbox"/> Long

<input type="checkbox"/> Plastic <input checked="" type="checkbox"/> Aluminum
--

Hub Carrier Bush	<input checked="" type="checkbox"/> Plastic <input type="checkbox"/> Brass
------------------	---




● Front Sus. Arm

<input type="checkbox"/> SS <input checked="" type="checkbox"/> Soft (Std.) <input type="checkbox"/> Hard

● Front Sus. Bush

Rear Side	<input checked="" type="checkbox"/>
-----------	-------------------------------------

● Front Upper Arm Position

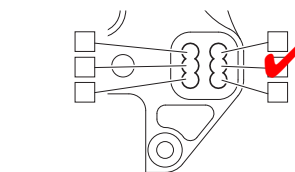


● Front Wheel Hub

<input type="checkbox"/> Narrow <input checked="" type="checkbox"/> Std. <input type="checkbox"/> Wide
--

● Front Hub Carrier

<input type="checkbox"/> Plastic <input checked="" type="checkbox"/> Aluminum
<input type="checkbox"/> 13° <input checked="" type="checkbox"/> 16° <input type="checkbox"/> 17.5° <input type="checkbox"/> 19° <input type="checkbox"/> 22°

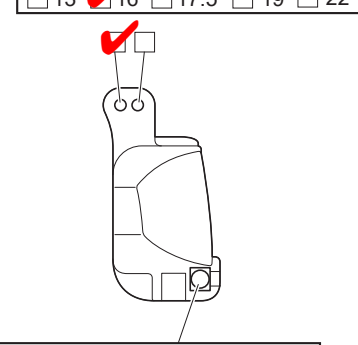

● Rear Sus. Bush

Front Side	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
Rear Side	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>


● Rear Sus. Arm

<input type="checkbox"/> Soft (Std.) <input checked="" type="checkbox"/> Hard
Rear Sus. Bush
Short <input type="checkbox"/> Medium <input type="checkbox"/> Long <input checked="" type="checkbox"/>

● Servo Horn

Steering	Throttle
<input type="checkbox"/> Plastic <input type="checkbox"/> AL. Long <input checked="" type="checkbox"/> AL. Short	<input type="checkbox"/> Plastic <input checked="" type="checkbox"/> AL.

● Steering Plate

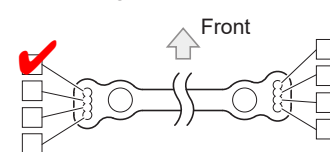

● Sway Bar

Front	Rear
φ2,4	φ2,7
0mm	2mm

● Weight

Front	Rear
<input type="checkbox"/> None <input type="checkbox"/> IFW604-10 <input checked="" type="checkbox"/> IFW604-20 <input type="checkbox"/> other +20g	<input type="checkbox"/> None <input type="checkbox"/> IFW605-10 <input checked="" type="checkbox"/> IFW605-20 <input type="checkbox"/> other

● Wing

<input checked="" type="checkbox"/> IF491(TK14)	Flap <input type="checkbox"/> None <input type="checkbox"/> 5mm <input type="checkbox"/> 8mm <input checked="" type="checkbox"/> Holes
000 0000 0000 000	

OPTIONS:

- titanium screws and turnbuckles
- IFW426 aluminium AMB Plate
- IFW626, IFW627 and IFW628 carbon parts
- IFW613 cva front and rear driveshafts
- MA081, IFW617 and IFW616 center dogbones
- IFW631 and IFW632 shock towers
- FINO-42 RSRC wing riser
- New 0.8 module center gear ratio